

XTRM[®] PLY INDUSTRIAL RACK TAPE


Protect Your Inventory With XTRM PLY[®] Industrial Rack Tape

Eliminate Scratches, Abrasion and Damage to Your Products from Racks and Shelving

EPT XTRM Ply Thermoplastic Polyurethane (TPU) Industrial Rack Tape provides exceptional abrasion resistance. With a low coefficient of friction, the smooth surface offers easy and safe placement and removal of materials on warehouse racks/shelves, reducing product damage.

Additional Benefits

- Enhanced puncture and tear resistance
- High impact protection
- Cold weather resistance
- High tear resistance to prevent puncture propagation

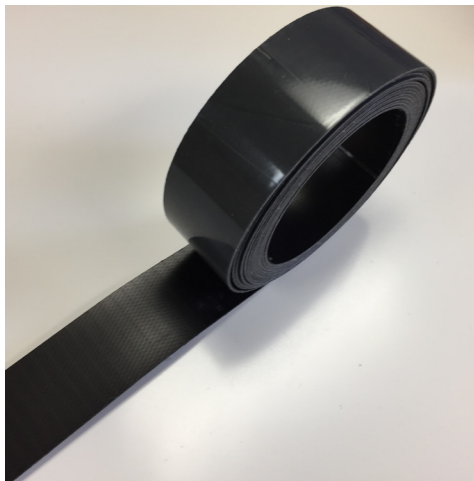

PHYSICAL PROPERTIES

ROLL WIDTH & LENGTH

2"W x 40'L

THICKNESS

ASTM D751; MINIMUM VALUE:
47.0(+/- 5%) MILS; 1.19 MM

COEFFICIENT OF FRICTION

ASTM D1894 STATIC; 1.15+/-0.15

ABRASION RESISTANCE (H18 WHEEL, 1000G LOAD)

ASTM D3884; > 20000

LOW TEMPERATURE FLEXIBILITY

ASTM D2136; -30F

HIGH TEMPERATURE RESISTANCE

ASTM D1204;
CONT. 1600/INT.180F

TEAR STRENGTH (TONGUE TEAR)

ASTM D751-B; 125 LBS (MD); 125 LBS (TD); 556N (MD); 556N (TD)

BREAKING STRENGTH (GRAB TENSILE)

ASTM D751-A; 450 LBS (MD); 450 LBS (TD); 2002N (MD); 2002N (TD)

PUNCTURE RESISTANCE (SCREW TIP)

ASTM D751; 135 LBS; 601N

WATER VAPOR PERMEABILITY

DIN 53122, PART 1; WDD12

NOTE: Product specifications are minimum values. Actual results may be higher.



For more information on XTRM PLY
Rack Tape, call us at 908-558-0011
or visit www.epttech.com.

